

DS-2920ZJ
Wall Mount



- Ease of installation. For thermographic cube camera and temperature screening separate camera.


▪ **Specification**

Accessory	
Appearance	Black
Material	Aluminum Alloy
Dimension	φ50 × 56.5 mm (Φ 1.97" × 2.22")
Weight	90 g (0.2 lb.)
Angle Adjustment	Panning: 360°; Tilting: 90°
Bracket Mounting Hole	3-M3 (Screw thread) / 3-φ3.5 (Thru Hole)
Device Mounting Hole	1/4" - 20UNC
Mount	Wall Mount
Accessory	1 * Installation guide; 1 * L-shaped 2.5 mm hexwrench
Load Capacity	400 g (0.88 lb.)
Application Scope	Compatible with thermographic cube camera and temperature screening separated camera

▪ **Available Model**

DS-2920ZJ

▪ **Dimension**

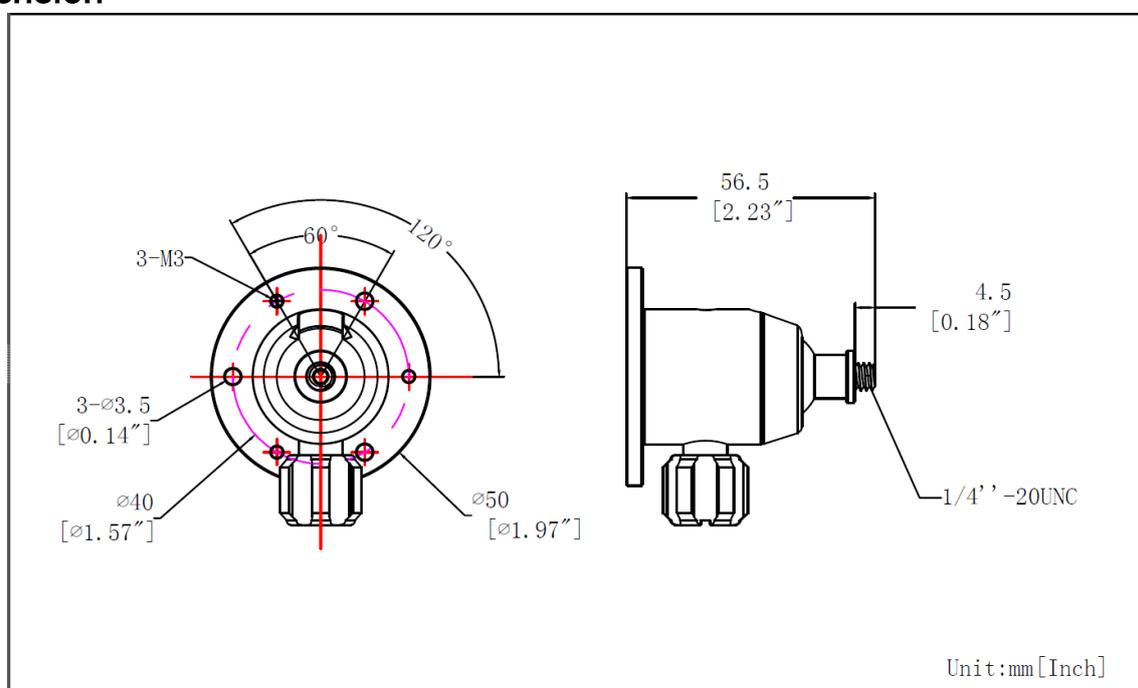

▪ AccessoryDS-2TD3017T-
3/VHM-TD3028T-
3/Q(B)HM-TD3028T-
2/Q(B)DS-2TD3017T-
2/VHM-TD3028T-
2/QHM-TD3028T-
3/Q

COMPLIANCE NOTICE: The thermal series products might be subject to export controls in various countries or regions, including without limitation, the United States, European Union, United Kingdom and/or other member countries of the Wassenaar Arrangement. Please consult your professional legal or compliance expert or local government authorities for any necessary export license requirements if you intend to transfer, export, re-export the thermal series products between different countries.

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
www.hikvision.com



Follow us on social media to get the latest product and solution information.

