

DS-3WR3N

300M Wireless Router

DS-3WR3N is a wireless router designed by Hikvision. With IEEE802.11n wireless standard and the wireless speed up to 300 Mbps, it is perfect for such activities as email, chat, streaming videos and online gaming. DS-3WR3N can also be used as a client router to connect ISP network wirelessly or uplink AP to share the internet to every corner. Equipped with amplified antennas for extra coverage to eliminate dead zones.



- 5-dBi external antennas
- Dual antennas for maximum coverage
- Supports IPTV




▪ Specification

Wireless Parameter	
Data Rate	2.4 GHz: 300 Mbps
Wireless Standard	IEEE 802.11b/g/n @2.4 GHz
Working Frequency Band	2.4 GHz
Transmitting Power	CE:<20 dBm
Antenna	2 x 5dBi external antennas
Operating Frequency	2400-2483.5 MHz (CH1-CH13)
EIRP Power(Max.)	18.5 dBm
Hardware Parameter	
Network Interface	4 × RJ45, 10/100 Mbps auto-negotiation
LED Indicator	SYS WLAN 1 2 3 WAN
Reset	WPS/RST button
Power Supply Method	9 VDC, 0.6 A power adapter power supply
Power Specifications	9 VDC, 0.6 A
Software Function	
Application function	Wireless Router Mode, Wireless Repeater Mode, Client + AP, WISP, and AP Mode supported DHCP Server supported Guest Network Configuration supported Signal Adjustment supported WiFi Schedule supported
Security Mode	WPA-PSK/WPA2-PSK, WPA/WPA2
Upgrade	Web, Update and Upgrade
System Log	System log
General	
Product Dimension (W × H × D)	174.82 mm × 96.45 mm × 181.06 mm (6.88" × 3.80" × 7.13")
Package Dimension (W × H × D)	231 mm × 203 mm × 51 mm (9.09" × 7.99" × 2.01")
Net Weight	134 g (0.295 lb)
Packing List	Wireless Router × 1, Ethernet cable × 1, Quick installation guide × 1
Packing Method	Single pack
Working Temperature	0 °C to 40 °C (32 °F to 104 °F)
Working Humidity	10% to 90% RH non-condensing
Storage Temperature	-40 °C to 70 °C (-40 °F to 158 °F)
Storage Humidity	5% to 90% RH non-condensing
Installation Mode	Desktop installation
Max. Power Consumption	≤ 5.4 W

▪ Available Model



DS-3WR3N

▪ Physical Interface

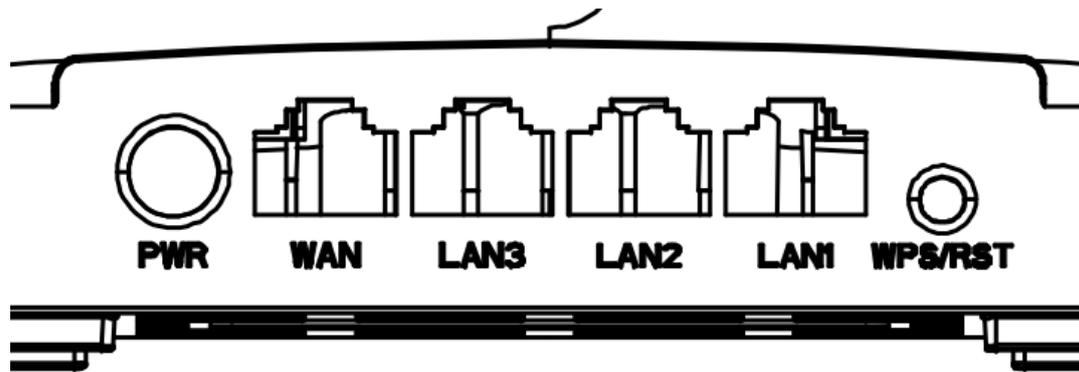


▪ Dimension

Unit: mm

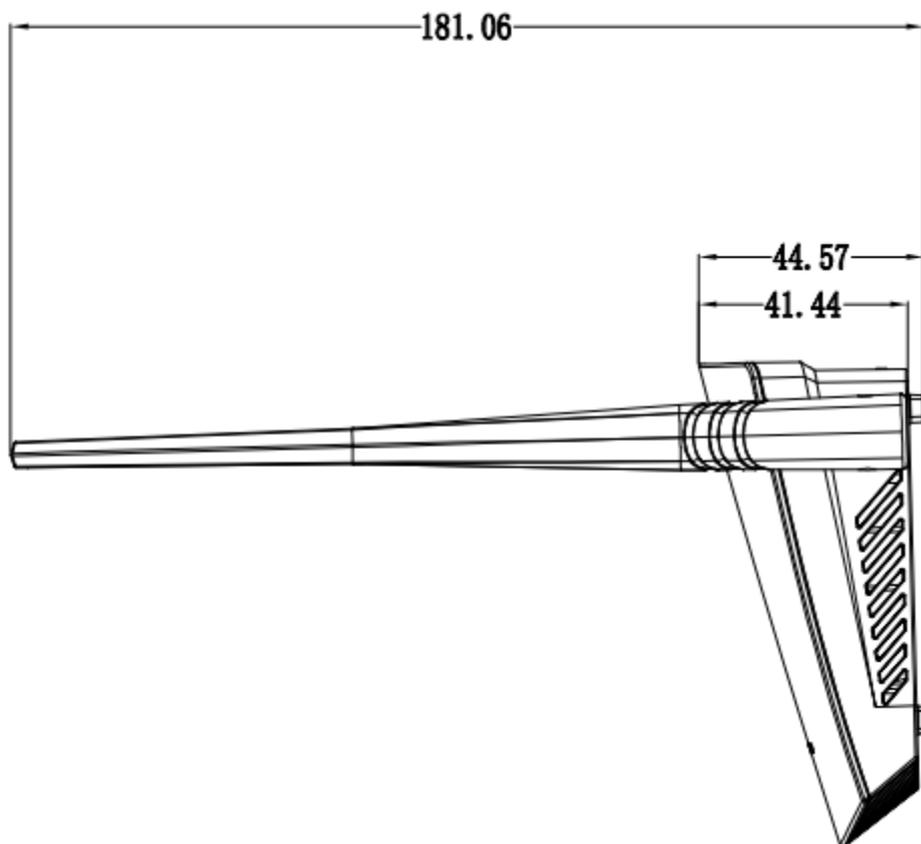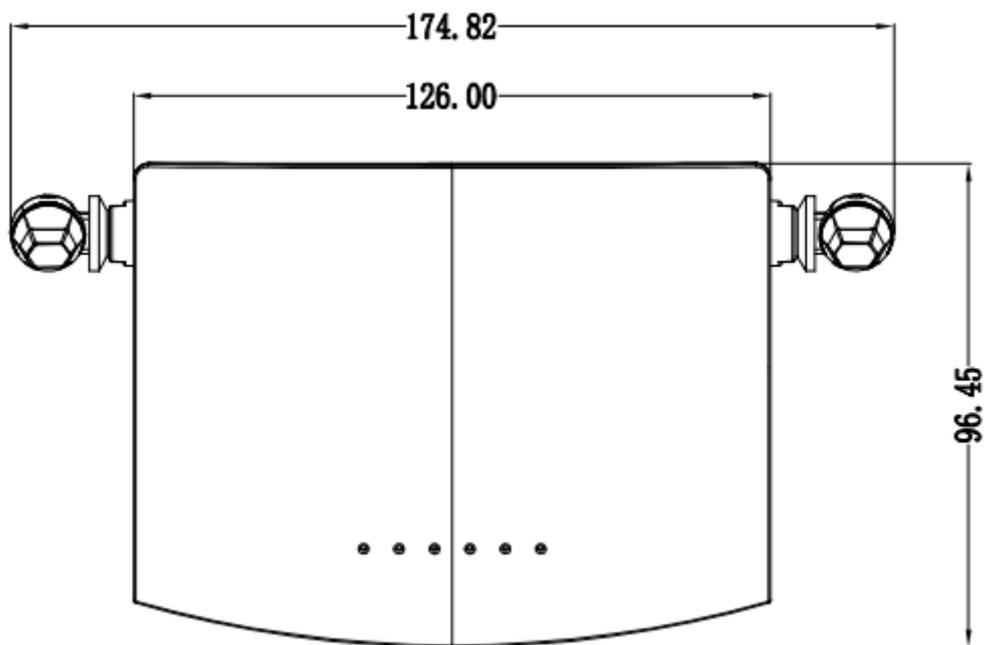

▪ Typical Application

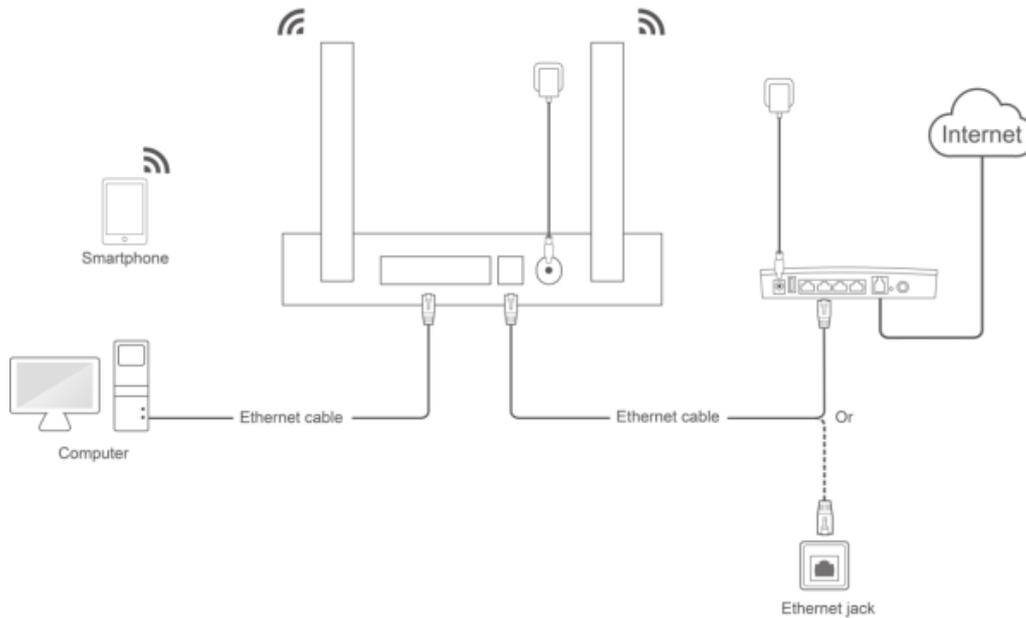

Distributed by



HIKVISION®

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
overseasbusiness@hikvision.com

Hikvision USA
T +1-909-895-0400
sales.usa@hikvision.com

Hikvision Australia
T +61-2-8599-4233
salesau@hikvision.com

Hikvision India
T +91-22-28469900
sales@pramahikvision.com

Hikvision Canada
T +1-866-200-6690
sales.canada@hikvision.com

Hikvision Thailand
T +662-275-9949
sales.thailand@hikvision.com

Hikvision Europe
T +31-23-5542770
sales.eu@hikvision.com

Hikvision Italy
T +39-0438-6902
info.it@hikvision.com

Hikvision Brazil
T +55 11 3318-0050
Latam.support@hikvision.com

Hikvision Turkey
T +90 (216)521 7070- 7074
sales.tr@hikvision.com

Hikvision Malaysia
T +601-7652-2413
sales.my@hikvision.com

Hikvision UK & Ireland
T +01628-902140
sales.uk@hikvision.com

Hikvision South Africa
Tel: +27 (10) 0351172
sale.africa@hikvision.com

Hikvision France
T +33(0)1-85-330-450
info.fr@hikvision.com

Hikvision Kazakhstan
T +7-727-9730667
nikia.panfilov@hikvision.ru

Hikvision Vietnam
T +84-974270888
sales.vt@hikvision.com

Hikvision UAE
T +971-4-4432090
salesme@hikvision.com

Hikvision Singapore
T +65-6684-4718
sg@hikvision.com

Hikvision Spain
T +34-91-737-16-55
info.es@hikvision.com

Hikvision Tashkent
T +99-87-1238-9438
uzb@hikvision.ru

Hikvision Hong Kong
T +852-2151-1761
info.hk@hikvision.com

Hikvision Russia
T +7-495-669-67-99
saleru@hikvision.com

Hikvision Korea
T +82-(0)31-731-8817
sales.korea@hikvision.com

Hikvision Poland
T +48-22-460-01-50
info.pl@hikvision.com

Hikvision Indonesia
T +62-21-2933759
Sales.Indonesia@hikvision.com

Hikvision Colombia
sales.colombia@hikvision.com