

LMG-AHDT800W PRO


5inch AHD CVI TVI CVBS 5MP 8MP
WIFI PTZ Camera Portable CCTV Tester
Monitor Pro




- 5 inch TFT-LCD screen, 800*480 resolutions
- 8MP TVI test, 3840 x 2160P 12.5/15 FPS, coaxial PTZ control & call OSD menu
- 8MP AHD test, 3840x2160P 15 FPS, coaxial PTZ & call OSD menu
- 8MP CVI test, 3840 x 2160P 12.5/15FPS, coaxial PTZ & call OSD menu
- Auto HD app, auto recognize HD coax camera type and resolution, support coaxial PTZ & call OSD menu.
- VGA input, up to 1920 x 1200P 60FPS, support snapshot, video record& playback.
- HD Input, up to 4K 30FPS, support snapshot, video record& playback.
- CVBS camera test, PTZ controller
- DC12V/1A power output, camera can be powered from DC 12 Voltage.
- DC 5V 1A power output, support reading USB disk

PRODUCT DETAILS

CD	Item series	H51&H52
	Display	New 5 inch TFT-LCD screen, 800*480 resolution
Video Mode	CVBS	1 channel BNC input, NTSC/PAL (Auto adapt) PTZ control, RS485 control, Baud 600-115200bps, compatible with more than 30 protocols such as PELCO-D/P, Samsung, Panasonic etc
	HD Coaxial test	8MP TVI camera test, 3840 x 2160P 12.5/15 FPS, UTC control / call OSD menu
		8MP CVI camera test, 3840 x 2160P 12.5/15 FPS, UTC control / call OSD menu
		8MP AHD test, 3840 x 2160P 15FPS, UTC control / call OSD menu
	HD input	8MP EX-SDI, HD-SDI, 3G-SDI, UTC control / call OSD menu * Auto HD app, auto recognize HD coax camera type and resolution, support coaxial PTZ & call OSD menu
VGA input	1 channel HD MI input, support 4K 30FPS. The resolution as follow: 4K_3840 x 2160/2K_2560 x 1440P/ 1920x1080P /1920x1080i /720x480P /720x576P /1280x720P/1024x768P/1280x1024P /1280x900P /1440x900P, etc	
Power output	12V/1A power output DC12V/1A power output, supply temporarily power for the camera	



PRODUCT DESCRIPTION

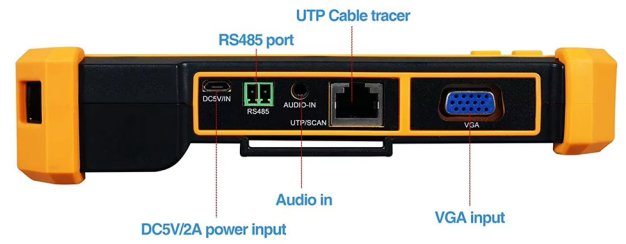

ADDITIONAL INFORMATION

