

DS-K1T341CMW Face Recognition Terminal



- Deep learning algorithm
- 4.3-inch capacitive touch screen, 2 MP wide-angle dual-lens
- 3,000 face capacity, 3,000 card capacity, and 150,000 event capacity
- Multiple authentication modes, including face, and card, etc.
- Face recognition duration < 0.2 s/User
- Supports mask wearing detection
- Connects to external access controller or Wiegand card reader via Wiegand protocol
- Connects to secure door control unit via RS-485 protocol to avoid the door opening when the terminal is destroyed
- Two-way audio with client software, door station, indoor station, and main station


▪ Specification

| Display | |
|----------------------------|--|
| Screen size | 4.3 inch |
| Operation method | Capacitive touch screen |
| Video | |
| Lens | 2 |
| Resolution | 2 MP (video stream: 720P) |
| FOV | HFOV = 41.5°; VFOV = 75.5°; DFOV = 87° |
| Audio | |
| Audio quality | Noise suppression and echo cancellation |
| Network | |
| Wired network | Support |
| Wi-Fi | Support, 2.4 G, 802.11b/g/n |
| Interface | |
| Network interface | 1 RJ-45, 10/100 M self-adaptive |
| Lock control | 1 |
| Exit button | 1 |
| Door contact input | 1 |
| TAMPER | 1 |
| RS-485 | 1,RS-485 (Half duplex,HIKVISION) |
| Wiegand | 1,Wiegand (Hik 26bit,Hik 34bit) |
| USB | 1 |
| Authentication | |
| Card type | M1 card |
| General | |
| Built-in access controller | Yes |
| Power supply | 12 VDC to 24 VDC, 2 A |
| Power consumption | ≤ 10 W |
| Working temperature | -30 °C to 60 °C (-22 °F to 140 °F) |
| Language | English, Spanish (South America), Arabic, Thai, Indonesian, Russian, Vietnamese, Portuguese (Brazil), Korean |
| Function | |
| Hik-Connect | Support |
| QR code recognition | Support |
| Face anti-spoofing | Support |
| Audio prompt | |

▪ Available Model

DS-K1T341CMW

▪ **Dimension**

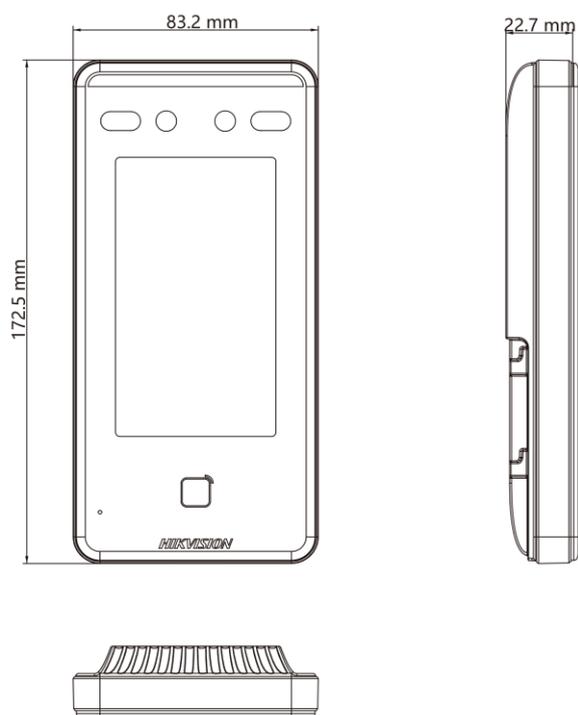

▪ **Accessory**

▪ **Optional**

| DS-KAB6-D1 Base Bracket | DS-KAB6-ZU1 Brackets for face terminals | DS-KAB671-P2 Stand Stick | DS-KAB34X-S1 Protective Shield |
|---|---|---|---|
|  |  |  |  |

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
www.hikvision.com



Follow us on social media to get the latest product and solution information.

